

防水透气阀

产品名称: LED 呼吸器/透气阀

产品材质: 尼龙/不锈钢/铝/黄铜镀镍+硅胶+膨体聚四氟乙烯(ePTFE)/无纺布 PET

工作温度: -40° ~ 125°

防护等级: IP67

透气性能: ≥1L/min@70mbar


耐静水压: ≥100mbar for 30min

产品特性: 防尘, 疏水, 透气, 散热

应用行业: 灯具照明, 汽车, 光伏, 安防等行业

订购说明:

- 1) 本款默认不配螺母, 如需另外购买;
- 2) 默认黄铜镀镍, 其他金属本色, 尼龙可选颜色为: 黑色(B), 浅灰色(G), 深灰色(P);
- 3) 产品价格为 (人民币: 元/套, 美元: USD/set) 。

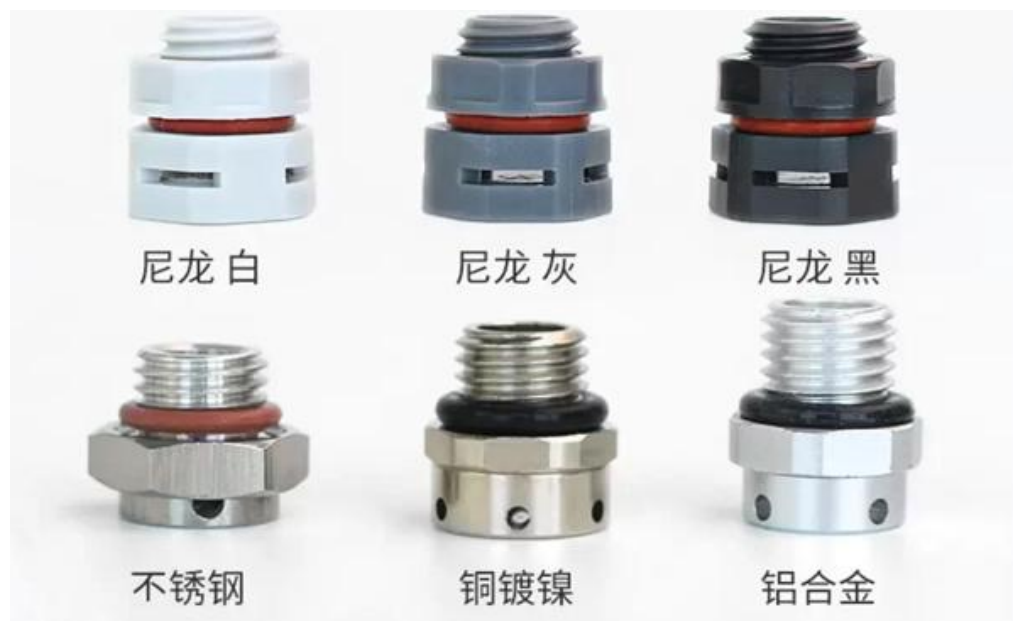

Nylon vent valve

Product name: LED respirator/vent valve

Product material: Nylon/stainless steel/aluminum/brass nickel plating+silica gel+expanded polytetrafluoroethylene (ePTFE)/non-woven PET

Operating temperature: - 40 °~125 °

Protection grade: IP67

Air permeability: ≥ 1L/ min@70mbar

Hydrostatic pressure resistance: ≥ 100mbar for 30min

Product characteristics: dust-proof, hydrophobic, breathable, heat dissipation

Application industry: lighting, automobile, photovoltaic, security, electrical and other industries

Ordering Instructions:

- 1) This item is not equipped with nuts by default, otherwise purchase;
- 2) Available colors: Default brass nickel plating, other metal natural colors, nylon optional colors are: black (B), light gray (G), dark gray (P);
- 3) The product price is (RMB: yuan/set, USD: USD/set).

尼龙透气阀/Nylon vent valve

蓝江产品型号	螺纹规格	产品尺寸/Product size		
Product model	Thread size	螺纹长度	扳手尺寸	对角尺寸
PN.	M thread	Thread length	Wrench Size	Diagonal dimension
TQ-M5	M5×0.8	7	11.5	12.4
TQ-M6	M6×1.0	7	11.5	12.4
TQ-M8	M8×1.25	10	17	18
TQ-M10	M10×1.5	10	17	18
TQ-M12	M12×1.5	10	17	18
TQ-M16	M16×1.5	10	22	24
TQ-M20	M20×1.5	10	24	26
TQ-M24	M24×1.5	15	35	40
TQ-M40	M40×1.5	15	56	60

金属透气阀/Metal vent valve

蓝江产品型号	螺纹规格	产品尺寸/Product size		
Product model	Thread size	螺纹长度	扳手尺寸	对角尺寸
PN.	M thread	Thread length	Wrench Size	Diagonal dimension
TQ-M5	M5×0.8	7	10	11
TQ-M6	M6×1.0	7	10	11
TQ-M8	M8×1.25	7	14	15.5
TQ-M10	M10×1.5	7	17	19
TQ-M12	M12×1.5	7	17	19
TQ-M16	M16×1.5	10	20	22
TQ-M20	M20×1.5	10	22	25