

## PE 管-聚乙烯波纹管

•**产品材料:** PE (聚乙烯)

•**阻燃等级:** HPB


•**工作温度:** -40°~105°, 短时可达 120°

•**订购说明:**

1) 默认黑色, 可选灰白色, 深灰色, 橙色等

2) 本款产品仅支持整卷购买, 详情咨询客服

3) 整卷价格为 (人民币: 元/卷, 美元: USD/volume)

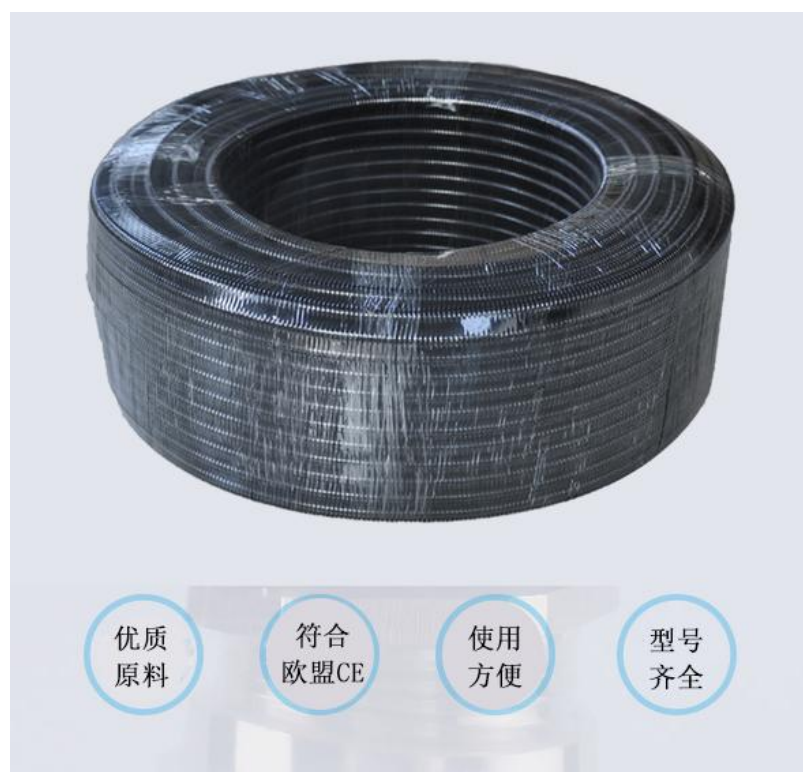

## PE cable conduit

•**Product material:** PE (polyethylene)

•**Flame retardant grade:** HPB

•**Working temperature:** - 40 °~105 °, up to 120 ° in a short time

•**Ordering Instructions:**

1) Default black, gray white, dark gray, orange, etc

2) This product only supports the purchase of the whole volume. Please consult the customer service for details

3) The price of the whole volume is (RMB: yuan/volume, USD: USD/volume)

## PE-HPB 管选型手册/PE-HPB pipe selection form

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat.r	Dyn.r	Packing
PN.	φ mm	mm	mm	mm	M/ring
PE-AD10.0	φ10	6.5×10	15	35	100
PE-AD13.0	φ13	9.5×13	20	45	100
PE-AD15.8	φ15.8	12×15.8	25	55	100
PE-AD18.5	φ18.5	14.3×18.5	35	65	100
PE-AD21.2	φ21.2	17×21.2	40	75	100/50
PE-AD25.5	φ25.5	21×25.5	42	85	50
PE-AD28.5	φ28.5	23×28.5	45	100	50
PE-AD34.5	φ34.5	29×34.5	55	120	50/25
PE-AD42.5	φ42.5	36×42.5	65	150	25
PE-AD54.5	φ54.5	48×54.5	80	190	25
PE-AD67.2	φ67.2	56.3×67.2	130	270	25
PE-AD80.0	φ80	66.5×80	170	350	25
PE-AD106.0	φ106	91×106	225	450	25