


## PP 管-V0 阻燃波纹管

- 产品材料:** PP(聚丙烯)
- 阻燃等级:** UL94V-0 阻燃
- 工作温度:** -40°~105°, 短时可达 120°
- 订购说明:**

- 1) 默认黑色, 可选灰白色, 深灰色, 橙色等
- 2) 本款产品仅支持可以整卷购买
- 3) 整卷价格为 (人民币: 元/卷, 美元: USD/volume)

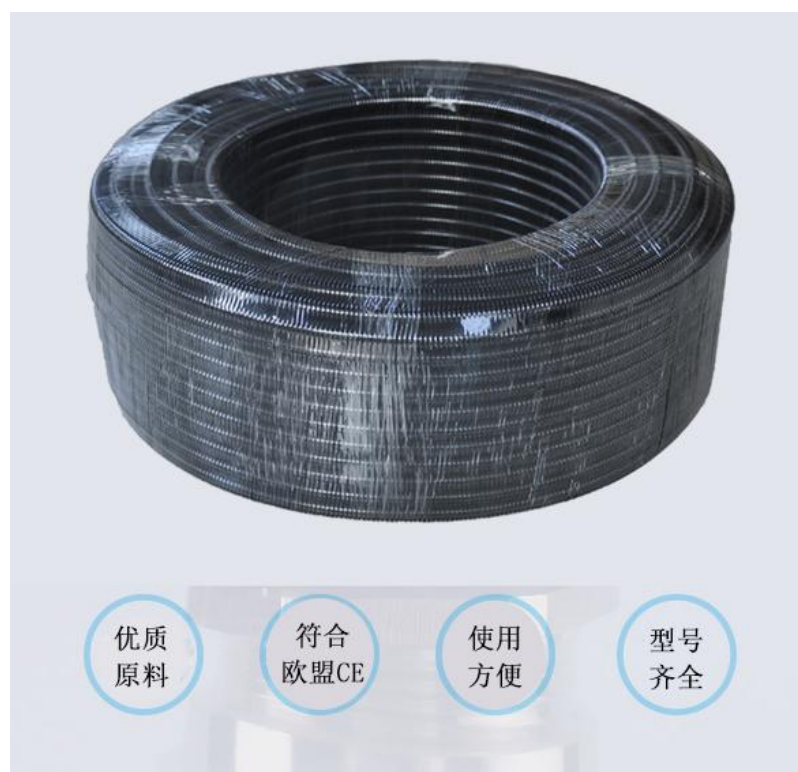

## V0 flame retardant cable conduit

- Product material:** PP
- Flame retardant grade:** UL94V-0 flame retardant
- Working temperature:** - 40 °~105 °, up to 120 ° in a short time
- Ordering Instructions:**

- 1) Default black, gray white, dark gray, orange, etc
- 2) This product can only be purchased in whole volume
- 3) The price of the whole volume is (RMB: yuan/volume, USD: USD/volume)

## PP-V0 管选型手册/PP-V0 pipe selection form

蓝江产品型号	公制管径	内径×外径	静态弯曲半径	动态弯曲半径	包装数量
Product model	Metric	ID×OD	Stat.r	Dyn.r	Packing
PN.	φ mm	mm	mm	mm	M/ring
PA-AD10.0-V0	φ10	6.5×10	15	35	100
PA-AD13.0-V0	φ13	9.5×13	20	45	100
PA-AD15.8-V0	φ15.8	12×15.8	25	55	100
PA-AD18.5-V0	φ18.5	14.3×18.5	35	65	100
PA-AD21.2-V0	φ21.2	17×21.2	40	75	100/50
PA-AD25.5-V0	φ25.5	21×25.5	42	85	50
PA-AD28.5-V0	φ28.5	23×28.5	45	100	50
PA-AD34.5-V0	φ34.5	29×34.5	55	120	50/25
PA-AD42.5-V0	φ42.5	36×42.5	65	150	25
PA-AD54.5-V0	φ54.5	48×54.5	80	190	25
PA-AD67.2-V0	φ67.2	56.3×67.2	130	270	25
PA-AD80.0-V0	φ80	66.5×80	170	350	25
PA-AD106.0-V0	φ106	91×106	225	450	25