

防水尼龙波纹管接头

- 产品材料：尼龙
- 防护等级：IP68
- 工作温度：-40°~105°，短时可达120°
- 阻燃等级：UL94V-2 阻燃
- 订购说明：


- 1) 标配螺母，无需请联系客服说明
- 2) 默认黑色，可选灰白色
- 3) 产品价格为（人民币：元/套，美元：USD/set）



Waterproof nylon cable conduit connector

- Product material: nylon
 - Protection grade: IP68
 - Working temperature: - 40 °~105 °, up to 120 ° in a short time
 - Flame retardant grade: UL94V-2 flame retardant
 - Ordering Instructions:
- 1) Standard nut, no need to contact customer service for instructions
 - 2) Default black, gray and dark gray can be selected
 - 3) The product price is (RMB: yuan/set, USD: USD/set)

产品结构图/Product Structure Diagram

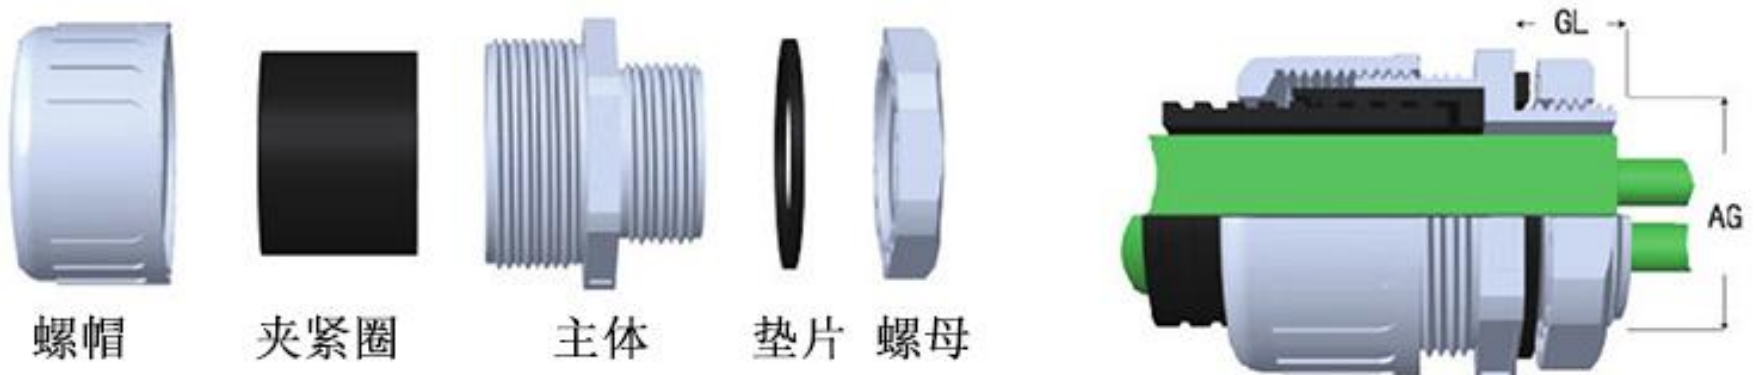

产品尺寸表/Product size

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度
Product model	Thread size	Adaptor hose	Thread diameter	Thread length
PN.	Metric	φ mm	AG mm	GL mm
RQ-M12-AD10.0	M12×1.5	AD10	12	9
RQ-M16-AD10.0	M16×1.5	AD10	16	15
RQ-M16-AD13.0	M16×1.5	AD13	16	15
RQ-M16-AD15.8	M16×1.5	AD15.8	16	15
RQ-M16-AD18.5	M16×1.5	AD18.5	16	15
RQ-M16-AD21.2	M16×1.5	AD21.2	16	15
RQ-M20-AD13.0	M20×1.5	AD13	20	15
RQ-M20-AD15.8	M20×1.5	AD15.8	20	15
RQ-M20-AD18.5	M20×1.5	AD18.5	20	15
RQ-M20-AD21.2	M20×1.5	AD21.2	20	15
RQ-M22-AD15.8	M22×1.5	AD15.8	22	10
RQ-M22-AD18.5	M22×1.5	AD18.5	22	10
RQ-M25-AD21.2	M25×1.5	AD21.2	25	15
RQ-M25-AD25.0	M25×1.5	AD25	25	15
RQ-M25-AD28.5	M25×1.5	AD28.5	25	15
RQ-M32-AD34.5	M32×1.5	AD34.5	32	15
RQ-M40-AD42.5	M40×1.5	AD42.5	40	15
RQ-M50-AD42.5	M50×1.5	AD42.5	50	15
RQ-M50-AD54.5	M50×1.5	AD54.5	50	26
RQ-M63-AD54.5	M63×1.5	AD54.5	63	26

蓝江产品型号	螺纹规格	电缆范围	螺纹直径	螺纹长度
Product model	Thread size	Cable range	Thread diameter	Thread length
PN.	Metric	φ mm	AG mm	GL mm
RQ-PG7-AD10.0	PG7	AD10	12.5	9
RQ-PG9-AD10.0	PG9	AD10	15.2	9
RQ-PG9-AD13.0	PG9	AD13	15.2	9
RQ-PG11-AD13.0	PG11	AD13	18.6	10
RQ-PG11-AD15.8	PG11	AD15.8	18.6	10
RQ-PG11-AD18.5	PG11	AD18.5	18.6	10
RQ-PG13.5-AD15.8	PG13.5	AD15.8	20.4	10
RQ-PG13.5-AD18.5	PG13.5	AD18.5	20.4	10
RQ-PG16-AD15.8	PG16	AD15.8	22.5	11
RQ-PG16-AD18.5	PG16	AD18.5	22.5	11
RQ-PG16-AD21.2	PG16	AD21.2	22.5	11
RQ-PG21-AD21.2	PG21	AD21.2	28.3	13
RQ-PG21-AD25.0	PG21	AD25.0	28.3	13
RQ-PG21-AD28.5	PG21	AD28.5	28.3	13
RQ-PG29-AD34.5	PG29	AD34.5	37	13
RQ-PG36-AD42.5	PG36	AD42.5	47	13
RQ-PG42-AD42.5	PG42	AD42.5	54	15
RQ-PG48-AD54.5	PG48	AD54.5	59.3	16
RQ-G1/4-AD10.0	G1/4	AD10	13.15	9
RQ-G3/8-AD13.0	G3/8	AD13	16.66	15
RQ-G1/2-AD15.8	G1/2	AD15.8	20.95	15
RQ-G1/2-AD18.5	G1/2	AD18.5	20.95	15
RQ-G1/2-AD21.2	G1/2	AD21.2	20.95	15
RQ-G3/4-AD21.2	G3/4	AD21.2	26.44	15
RQ-G3/4-AD25.0	G3/4	AD25.0	26.44	15
RQ-G3/4-AD28.5	G3/4	AD28.5	26.44	15
RQ-G1-AD34.5	G1	AD34.5	33.2	15
RQ-G1-1/4-AD42.5	G1-1/4	AD42.5	41.9	15
RQ-G1-1/2-AD42.5	G1-1/2	AD42.5	47.8	15
RQ-G2-AD54.5	G2	AD54.5	59.6	15