

防水不锈钢波纹管接头

•**产品材料:** 不锈钢+EPDM

•**防护等级:** IP68

•**工作温度:** -40° ~ 105°, 短时可达 120°

•**阻燃等级:** UL94V-2 阻燃

•**订购说明:**

- 1) 标配螺母, 无需请联系客服说明
- 2) 默认 304 不锈钢, 316 及 316L 需要定制
- 3) 产品价格为 (人民币: 元/套, 美元: USD/set)



Waterproof stainless steel cable conduit connector

•**Product material:** stainless steel+EPDM

•**Protection grade:** IP68



•**Working temperature:** - 40 °~105 °, up to 120 ° in a short time

•**Flame retardant grade:** UL94V-2 flame retardant

•**Ordering Instructions:**

- 1) Standard nut, no need to contact customer service for instructions
- 2) Default 304 stainless steel, 316 and 316L need to be customized
- 3) The product price is (RMB: yuan/set, USD: USD/set)

产品结构图/Product Structure Diagram

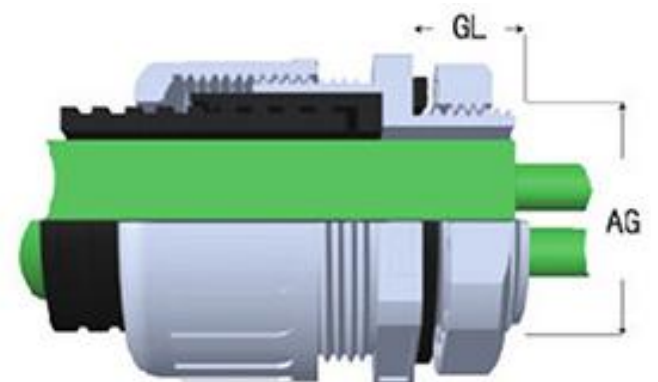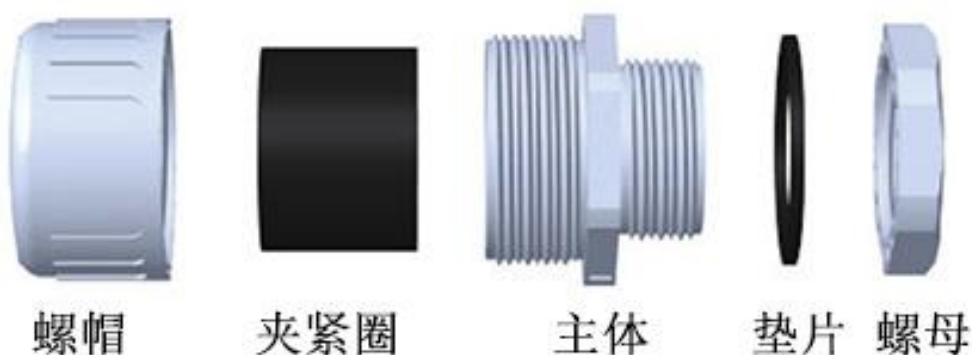

产品尺寸表/Product size

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度
Product model	Thread size	Hose	Thread diameter	Thread length
PN.	Metric	φ mm	AG mm	GL mm
RQ-M12-AD10.0-SS	M12×1.5	AD10	12	9
RQ-M16-AD10.0-SS	M16×1.5	AD10	16	9.5
RQ-M16-AD13.0-SS	M16×1.5	AD13	16	9.5
RQ-M16-AD15.8-SS	M16×1.5	AD15.8	16	9.5
RQ-M20-AD13.0-SS	M20×1.5	AD13	20	12
RQ-M20-AD15.8-SS	M20×1.5	AD15.8	20	12
RQ-M20-AD18.5-SS	M20×1.5	AD18.5	20	12
RQ-M20-AD21.2-SS	M20×1.5	AD21.2	20	12
RQ-M22-AD15.8-SS	M22×1.5	AD15.8	22	12
RQ-M22-AD18.5-SS	M22×1.5	AD18.5	22	12
RQ-M25-AD21.2-SS	M25×1.5	AD21.2	25	12
RQ-M25-AD25.0-SS	M25×1.5	AD25	25	12
RQ-M25-AD28.5-SS	M25×1.5	AD28.5	25	12
RQ-M32-AD34.5-SS	M32×1.5	AD34.5	32	12.5
RQ-M40-AD42.5-SS	M40×1.5	AD42.5	40	14
RQ-M50-AD42.5-SS	M50×1.5	AD42.5	50	15
RQ-M50-AD54.5-SS	M50×1.5	AD54.5	50	15
RQ-M63-AD54.5-SS	M63×1.5	AD54.5	63	15
RQ-G1/4-AD10.0-SS	G1/4	AD10	13.15	9
RQ-G3/8-AD13.0-SS	G3/8	AD13	16.66	9.5
RQ-G1/2-AD15.8-SS	G1/2	AD15.8	20.95	12
RQ-G1/2-AD18.5-SS	G1/2	AD18.5	20.95	12
RQ-G1/2-AD21.2-SS	G1/2	AD21.2	20.95	12
RQ-G3/4-AD21.2-SS	G3/4	AD21.2	26.44	12
RQ-G3/4-AD25.0-SS	G3/4	AD25.0	26.44	12
RQ-G3/4-AD28.5-SS	G3/4	AD28.5	26.44	12
RQ-G1-AD34.5-SS	G1	AD34.5	33.2	15
RQ-G1-1/4-AD42.5-SS	G1-1/4	AD42.5	41.9	15
RQ-G1-1/2-AD42.5-SS	G1-1/2	AD42.5	47.8	15
RQ-G2-AD54.5-SS	G2	AD54.5	59.6	15

防水铜镀镍波纹管接头

•**产品材料:** 黄铜镀镍+EPDM

•**防护等级:** IP68

•**工作温度:** -40°~105°, 短时可达120°

•**阻燃等级:** UL94V-2 阻燃

•**订购说明:**

1) 标配螺母, 无需请联系客服说明

2) 默认黄铜镀镍, 接受定制, 联系客服

3) 产品价格为 (人民币: 元/套, 美元: USD/set)



Waterproof copper nickel plated corrugated pipe joint

•**Product material:** nickel plated brass+EPDM

•**Protection grade:** IP68

•**Working temperature:** - 40 °~105 °, up to 120 ° in a short time

•**Flame retardant grade:** UL94V-2 flame retardant


•**Ordering Instructions:**

1) Standard nut, no need to contact customer service for instructions

2) Default brass nickel plating, accept customization, contact customer service

3) The product price is (RMB: yuan/set, USD: USD/set)

产品结构图/Product Structure Diagram

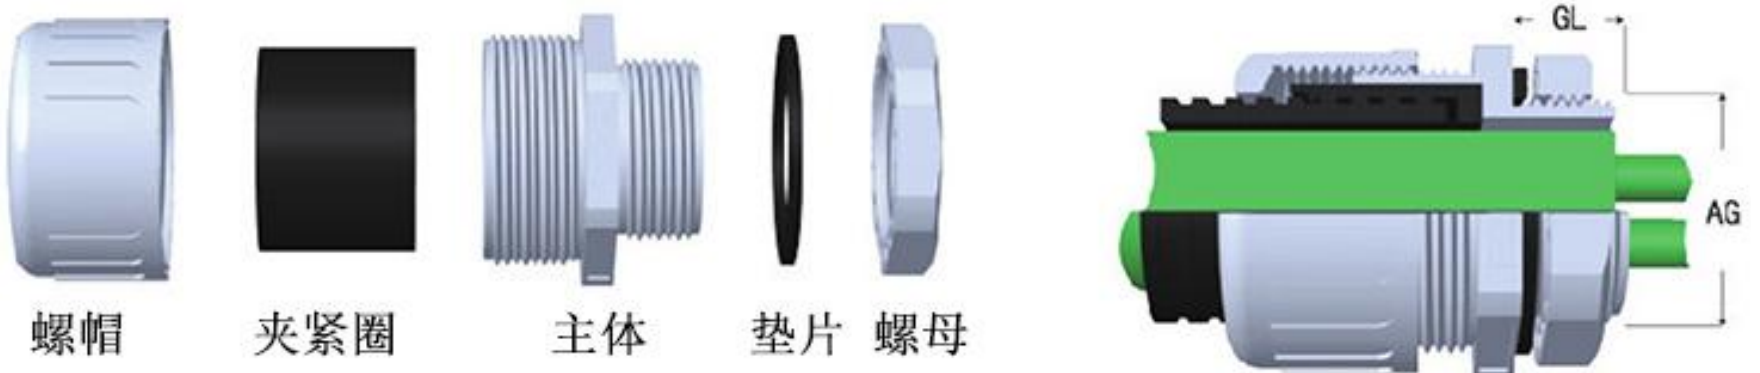

产品尺寸表/Product size

蓝江产品型号	螺纹规格	适配软管	螺纹直径	螺纹长度
Product model	Thread size	Hose	Thread diameter	Thread length
PN.	Metric	φ mm	AG mm	GL mm
RQ-M12-AD10.0	M12×1.5	AD10	12	9
RQ-M16-AD10.0	M16×1.5	AD10	16	9.5
RQ-M16-AD13.0	M16×1.5	AD13	16	9.5
RQ-M16-AD15.8	M16×1.5	AD15.8	16	9.5
RQ-M20-AD13.0	M20×1.5	AD13	20	12
RQ-M20-AD15.8	M20×1.5	AD15.8	20	12
RQ-M20-AD18.5	M20×1.5	AD18.5	20	12
RQ-M20-AD21.2	M20×1.5	AD21.2	20	12
RQ-M22-AD15.8	M22×1.5	AD15.8	22	12
RQ-M22-AD18.5	M22×1.5	AD18.5	22	12
RQ-M25-AD21.2	M25×1.5	AD21.2	25	12
RQ-M25-AD25.0	M25×1.5	AD25	25	12
RQ-M25-AD28.5	M25×1.5	AD28.5	25	12
RQ-M32-AD34.5	M32×1.5	AD34.5	32	12.5
RQ-M40-AD42.5	M40×1.5	AD42.5	40	14
RQ-M50-AD42.5	M50×1.5	AD42.5	50	15
RQ-M50-AD54.5	M50×1.5	AD54.5	50	15
RQ-M63-AD54.5	M63×1.5	AD54.5	63	15
RQ-G1/4-AD10.0	G1/4	AD10	13.15	9
RQ-G3/8-AD13.0	G3/8	AD13	16.66	9.5
RQ-G1/2-AD15.8	G1/2	AD15.8	20.95	12
RQ-G1/2-AD18.5	G1/2	AD18.5	20.95	12
RQ-G1/2-AD21.2	G1/2	AD21.2	20.95	12
RQ-G3/4-AD21.2	G3/4	AD21.2	26.44	12
RQ-G3/4-AD25.0	G3/4	AD25.0	26.44	12
RQ-G3/4-AD28.5	G3/4	AD28.5	26.44	12
RQ-G1-AD34.5	G1	AD34.5	33.2	15
RQ-G1-1/4-AD42.5	G1-1/4	AD42.5	41.9	15
RQ-G1-1/2-AD42.5	G1-1/2	AD42.5	47.8	15
RQ-G2-AD54.5	G2	AD54.5	59.6	15