

# RGQ 铜镀镍带锁紧防水波纹管接头

•**产品材料:** 黄铜镀镍

•**防护等级:** IP68


•**工作温度:** -40° ~ 105°, 短时可达 120°

•**阻燃等级:** UL94V-2 阻燃

•**订购说明:**

1) 默认不配螺母, 如需请另外购买;

2) 产品价格为 (人民币: 元/套, 美元: USD/set)

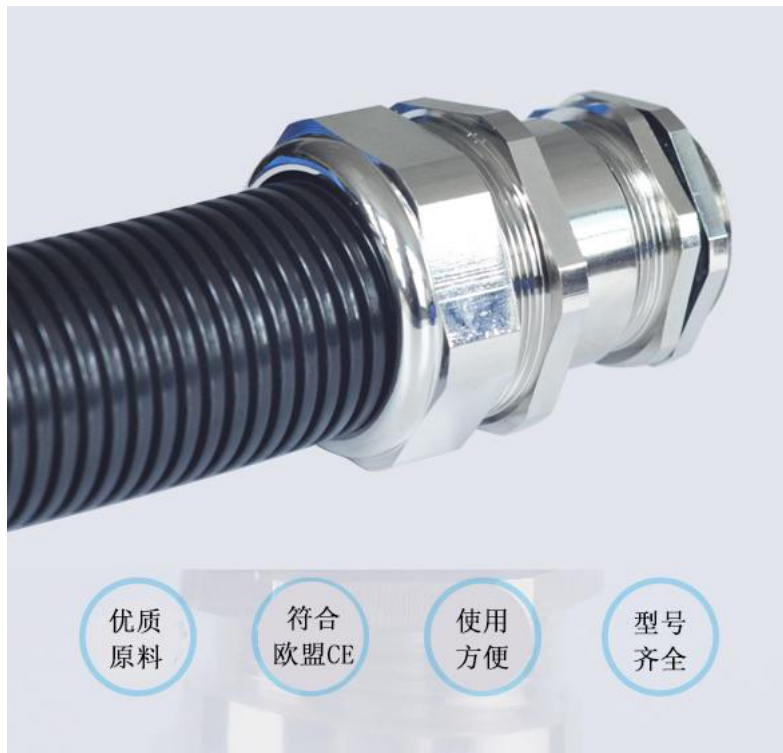

## RGQ waterproof corrugated pipe connector with locking

•**Product material:** nickel plated brass

•**Protection grade:** IP68

•**Working temperature:** - 40 °~105 °, up to 120 ° in a short time

•**Flame retardant grade:** UL94V-2 flame retardant

•**Ordering instructions:**

1) No nut is provided by default, please purchase separately if necessary;

2) The product price is (RMB: yuan/set, USD: USD/set)

### 产品尺寸表/Product size

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Adapter hose	Thread L	Wrench Size
PN.	Metric	φ mm	AD mm	GL mm	nut/cap mm
RGQ-M12-08-AD13	M12×1.5	4~8	AD13	8	14/22
RGQ-M16-08-AD13	M16×1.5	4~8	AD13	8	18/22
RGQ-M16-10-AD15.8	M16×1.5	6~10	AD15.8	8	18/24
RGQ-M20-12-AD15.8	M20×1.5	7~12	AD21.2	8	22/24
RGQ-M20-14-AD18.5	M20×1.5	8~14	AD21.2	9	22/28
RGQ-M25-16-AD21.2	M25×1.5	12~16	AD21.2	10	27/32
RGQ-M25-18-AD25	M25×1.5	13~18	AD28.5	10	27/38
RGQ-M25-18-AD28.5	M25×1.5	13~18	AD28.5	10	27/40
RGQ-M32-25-AD34.5	M32×1.5	18~25	AD34.5	10	36/44
RGQ-M40-30-AD42.5	M40×1.5	25~30	AD42.5	12	45/54
RGQ-M50-38-AD54.5	M50×1.5	32~38	AD54.5	12	58/68
RGQ-M63-44-AD54.5	M63×1.5	36~44	AD54.5	15	64/68