

## RGB 一体式波纹管固定支架

•产品材料：尼龙

•阻燃等级：UL94V-2 阻燃

•工作温度：-40°~105°，短时可达 120°

•订购说明：

1) 默认黑色，可选灰白色，深灰色等

2) 零售价格为（人民币：元/个，美元：USD/PCS）



## RGB integrated corrugated pipe fixing bracket

•Product material: nylon

•Flame retardant grade: UL94V-2 flame retardant

•Working temperature: - 40 °~105 °, up to 120 ° in a short time

•Ordering instructions:

1) Default black, gray white, dark gray, etc

2) The retail price is (RMB: yuan/piece, USD: USD/PCS)

### 产品尺寸表/Product size

蓝江产品型号	适配软管	长度	高度	螺孔
Product model	Hose	length	height	Screw hole
PN.	φ mm	mm	mm	mm
RGB-AD10.0	AD10.0	30	23	6.5
RGB-AD13.0	AD13.0	30	23	6.5
RGB-AD15.8	AD15.8	30	23	6.5
RGB-AD18.5	AD18.5	35	30	6.5
RGB-AD21.2	AD21.2	35	30	6.5
RGB-AD25.0	AD25.0	35	30	6.5
RGB-AD28.5	AD28.5	42	38	11.5
RGB-AD34.5	AD34.5	51	43	11.5
RGB-AD42.5	AD42.5	61	51	11.5
RGB-AD54.5	AD54.5	74	64	11.5

## RGA 分体式波纹管固定支架

•产品材料：尼龙


•阻燃等级：UL94V-2 阻燃

•工作温度：-40°~105°，短时可达120°

•订购说明：

3) 默认黑色，可选灰白色，深灰色等

4) 零售价格为（人民币：元/个，美元：USD/PCS）

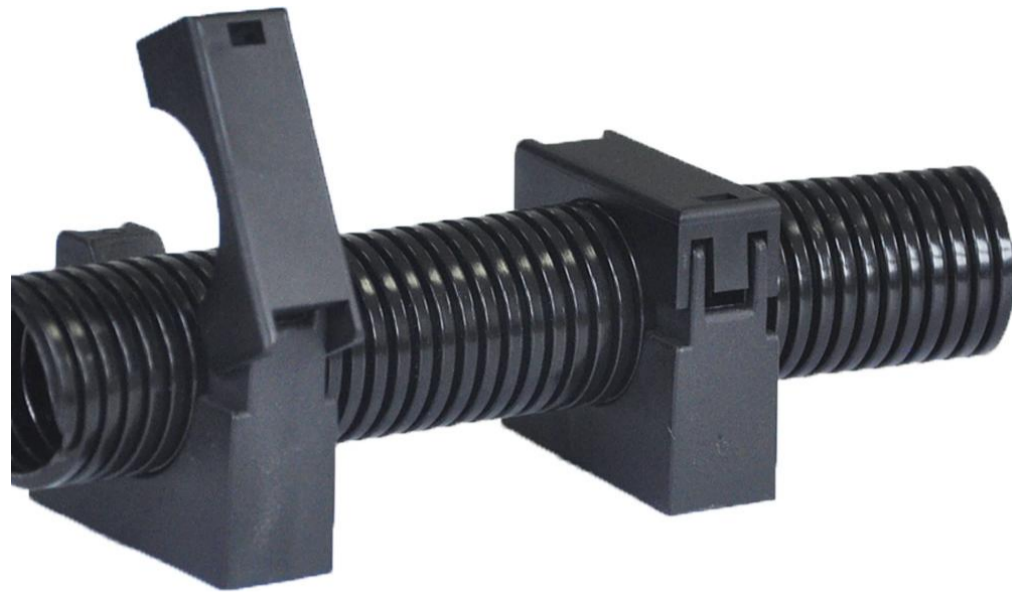

## RGA Split Bellows Mounting Bracket

•Product material: nylon

•Flame retardant grade: UL94V-2 flame retardant

•Working temperature: - 40 °~105 °, up to 120 ° in a short time

•Ordering instructions:

1) Default black, gray white, dark gray, etc

2) The retail price is (RMB: yuan/piece, USD: USD/PCS)

### 产品尺寸表/Product size

蓝江产品型号	适配软管	长度	高度	螺孔
Product model	Hose	length	height	Screw hole
PN.	φ mm	mm	mm	mm
RGA-AD10.0	AD10.0	30	23	6.5
RGA-AD13.0	AD13.0	30	23	6.5
RGA-AD15.8	AD15.8	30	23	6.5
RGA-AD18.5	AD18.5	35	30	6.5
RGA-AD21.2	AD21.2	35	30	6.5
RGA-AD25.0	AD25.0	35	30	6.5
RGA-AD28.5	AD28.5	42	38	11.5
RGA-AD34.5	AD34.5	51	43	11.5
RGA-AD42.5	AD42.5	61	51	11.5
RGA-AD54.5	AD54.5	74	64	11.5